



# D-Series Size 1 LED Wall Luminaire




d#series

## Specifications Luminaire

**Width:** 13-3/4" (34.9 cm) **Weight:** 12 lbs (5.4 kg)  
**Depth:** 10" (25.4 cm)  
**Height:** 6-3/8" (16.2 cm)

## Back Box (BBW, ELCW)

**Width:** 13-3/4" (34.9 cm) **BBW Weight:** 5 lbs (2.3 kg)  
**Depth:** 4" (10.2 cm) **ELCW Weight:** 10 lbs (4.5 kg)  
**Height:** 6-3/8" (16.2 cm)

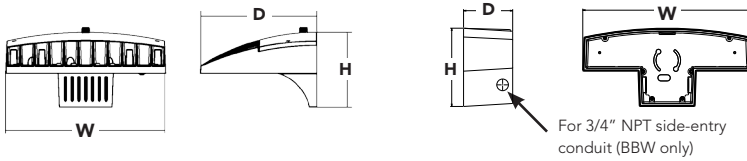

Catalog Number
Notes
Type

Hit the Tab key or mouse over the page to see all interactive elements.

## Introduction

The D-Series Wall luminaire is a stylish, fully integrated LED solution for building-mount applications. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and up to 74% in energy savings over comparable 250W metal halide luminaires, the D-Series Wall is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

## Ordering Information

**EXAMPLE: DSXW1 LED 20C 1000 40K T3M MVOLT DDBTXD**

Series	LEDs	Drive Current	Color temperature	Distribution	Voltage	Mounting	Control Options	Other Options	Finish (required)
<b>DSXW1 LED</b>									
<b>DSXW1 LED</b>	<b>10C</b> 10 LEDs (one engine)	350 350 mA 530 530 mA 700 700 mA	30K 3000 K 40K 4000 K <b>50K</b> 5000 K	T2S Type II Short T2M Type II Medium T3S Type III Short	<b>MVOLT</b> 120 <sup>1</sup> 208 <sup>1</sup> 240 <sup>1</sup> 277 <sup>1</sup> 347 <sup>2</sup> 480 <sup>2</sup>	<b>Shipped included</b> (blank) Surface mounting bracket <b>BBW</b> Surface-mounted back box (for conduit entry) <sup>3</sup>	<b>Shipped installed</b> PE Photoelectric cell, button type <sup>4</sup> DMG 0-10V dimming driver (no controls) PIR 180° motion/ambient light sensor, <15' mtg ht <sup>5</sup> PIRH 180° motion/ambient light sensor, 15-30' mtg ht <sup>5</sup> ELCW Emergency battery backup (includes external component enclosure) <sup>6</sup>	<b>Shipped installed</b> SF Single fuse (120, 277 or 347V) <sup>7</sup> DF Double fuse (208, 240 or 480V) <sup>7</sup> HS House-side shield <sup>8</sup> SPD Separate surge protection <sup>9</sup> <b>Shipped separately</b> BSW Bird-deterrent spikes WG Wire guard VG Vandal guard DDL Diffused drop lens	<b>DDBXD</b> Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DSSXD Sandstone DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white DSSTXD Textured sandstone
	20C 20 LEDs (two engines)	<b>1000</b> 1000 mA (1 A)	AMBPC Amber phosphor converted	<b>T3M</b> Type III Medium T4M Type IV Medium TFTM Forward Throw Medium ASYDF Asymmetric diffuse					

### NOTES

- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120, 208, 240 or 277 options only when ordering with fusing (SF, DF options), or photocontrol (PE option).
- Only available with 20C, 700mA or 1000mA. Not available with PIR or PIRH.
- Back box ships installed on fixture. Cannot be field installed. Cannot be ordered as an accessory.
- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- PIR specifies the Sensor Switch SBGR-10-ODP control; PIRH specifies the Sensor Switch SBGR-6-ODP control; see Motion Sensor Guide for details. Includes ambient light sensor. Not available with "PE" option (button type photocell). Dimming driver standard. Not available with 20 LED/1000 mA configuration (DSXW1 LED 20C 1000).
- Cold weather (-20C) rated. Not compatible with conduit entry applications. Not available with BBW mounting option. Not available with fusing. Not available with 347 or 480 voltage options. Emergency components located in back box housing. Emergency mode IES files located on product page at [www.lithonia.com](http://www.lithonia.com)
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option. Not available with ELCW.
- Also available as a separate accessory; see Accessories information.
- See the electrical section on page 3 for more details.

## Accessories

Ordered and shipped separately.

DSXWHS U	House-side shield (one per light engine)
DSXWBSW U	Bird-deterrent spikes
DSXW1WG U	Wire guard accessory
DSXW1VG U	Vandal guard accessory



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K					40K					50K					AMBER				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
10C (10 LEDs)	530mA	20 W	T2S	1,843	1	0	1	92	1,956	1	0	1	98	1,729	1	0	1	86	1,264	0	0	1	63
			T2M	1,756	1	0	1	88	1,864	1	0	1	93	1,648	1	0	1	82	1,205	0	0	1	60
			T3S	1,822	0	0	1	91	1,934	0	0	1	97	1,710	0	0	1	86	1,250	0	0	1	63
			T3M	1,804	1	0	1	90	1,914	1	0	1	96	1,693	1	0	1	85	1,237	0	0	1	62
			T4M	1,767	1	0	1	88	1,876	1	0	1	94	1,658	0	0	1	83	1,212	0	0	1	61
			TFTM	1,837	0	0	1	92	1,950	0	0	1	98	1,724	0	0	1	86	1,260	0	0	1	63
			ASYDF	1,642	1	0	1	82	1,743	1	0	1	87	1,541	1	0	1	77	1,127	0	0	1	56
			T2S	2,272	1	0	1	84	2,409	1	0	1	89	2,421	1	0	1	90	1,544	0	0	1	57
			T2M	2,165	1	0	1	80	2,296	1	0	1	85	2,307	1	0	1	85	1,472	0	0	1	55
	T3S	2,247	1	0	1	83	2,382	1	0	1	88	2,394	1	0	1	89	1,527	0	0	1	57		
	T3M	2,224	1	0	1	82	2,358	1	0	1	87	2,370	1	0	1	88	1,512	0	0	1	56		
	T4M	2,179	1	0	1	81	2,310	1	0	1	86	2,322	1	0	1	86	1,481	0	0	1	55		
	TFTM	2,265	1	0	1	84	2,401	1	0	1	89	2,413	1	0	1	89	1,539	0	0	1	57		
	ASYDF	2,025	1	0	1	75	2,147	1	0	1	80	2,158	1	0	1	80	1,376	1	0	1	51		
	T2S	3,011	1	0	1	75	3,190	1	0	1	80	3,202	1	0	1	80	2,235	1	0	1	58		
	T2M	2,870	1	0	1	72	3,040	1	0	1	76	3,051	1	0	1	76	2,130	1	0	2	55		
	T3S	2,978	1	0	1	74	3,155	1	0	1	79	3,166	1	0	1	79	2,210	1	0	2	57		
	T3M	2,948	1	0	1	74	3,123	1	0	1	78	3,134	1	0	1	78	2,187	1	0	2	56		
	T4M	2,888	1	0	1	72	3,059	1	0	1	76	3,071	1	0	1	77	2,143	1	0	2	55		
	TFTM	3,002	1	0	1	75	3,180	1	0	1	80	3,192	1	0	1	80	2,228	1	0	2	57		
	ASYDF	2,684	1	0	1	67	2,843	1	0	1	71	2,854	1	0	1	71	1,991	1	0	2	51		
	T2S	3,649	1	0	1	101	3,876	1	0	1	108	3,429	1	0	1	95	2,504	1	0	1	70		
	T2M	3,478	1	0	1	97	3,694	1	0	1	103	3,267	1	0	1	91	2,387	1	0	1	66		
	T3S	3,609	1	0	1	100	3,833	1	0	1	106	3,390	1	0	1	94	2,477	1	0	1	69		
	T3M	3,572	1	0	1	99	3,794	1	0	1	105	3,356	1	0	1	93	2,451	1	0	2	68		
	T4M	3,500	1	0	2	97	3,717	1	0	2	103	3,288	1	0	1	91	2,402	1	0	1	67		
	TFTM	3,638	1	0	1	101	3,864	1	0	1	107	3,418	1	0	1	95	2,496	1	0	1	69		
ASYDF	3,252	1	0	2	90	3,454	1	0	2	96	3,056	1	0	2	85	2,232	1	0	1	62			
T2S	4,502	1	0	1	96	4,776	1	0	1	102	4,794	1	0	1	102	3,065	1	0	1	65			
T2M	4,290	1	0	1	91	4,552	1	0	1	97	4,569	1	0	1	97	2,921	1	0	1	62			
T3S	4,452	1	0	1	95	4,723	1	0	2	100	4,741	1	0	2	101	3,031	1	0	1	64			
T3M	4,407	1	0	2	94	4,675	1	0	2	99	4,693	1	0	2	100	3,000	1	0	1	64			
T4M	4,318	1	0	2	92	4,581	1	0	2	97	4,598	1	0	2	98	2,939	1	0	1	63			
TFTM	4,488	1	0	2	95	4,761	1	0	2	101	4,779	1	0	2	102	3,055	1	0	1	65			
ASYDF	4,012	1	0	2	85	4,257	1	0	2	91	4,273	1	0	2	91	2,732	1	0	1	58			
T2S	5,963	1	0	1	80	6,327	1	0	1	84	6,351	1	0	1	85	4,429	1	0	1	61			
T2M	5,683	1	0	2	76	6,029	1	0	2	80	6,052	1	0	2	81	4,221	1	0	2	58			
T3S	5,896	1	0	2	79	6,256	1	0	2	83	6,280	1	0	2	84	4,380	1	0	2	60			
T3M	5,837	1	0	2	78	6,193	1	0	2	83	6,216	1	0	2	83	4,335	1	0	2	59			
T4M	5,719	1	0	2	76	6,067	1	0	2	81	6,090	1	0	2	81	4,248	1	0	2	58			
TFTM	5,944	1	0	2	79	6,307	1	0	2	84	6,330	1	0	2	84	4,415	1	0	2	60			
ASYDF	5,314	1	0	2	71	5,638	2	0	2	75	5,660	2	0	2	75	3,947	1	0	2	54			



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
<b>25°C</b>	<b>77°F</b>	<b>1.00</b>
30°C	86°F	1.00
40°C	104°F	0.98

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **DSXW1 LED 20C 1000** platform in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	0.95	0.93	0.88


### Electrical Load

LEDs	Drive Current (mA)	System Watts	Current (A)					
			120V	208V	240V	277V	347V	480V
10C	350	14 W	0.13	0.07	0.06	0.06	-	-
	530	20 W	0.19	0.11	0.09	0.08	-	-
	700	27 W	0.25	0.14	0.13	0.11	-	-
	1000	40 W	0.37	0.21	0.19	0.16	-	-
20C	350	25 W	0.23	0.13	0.12	0.10	-	-
	530	36 W	0.33	0.19	0.17	0.14	-	-
	700	47 W	0.44	0.25	0.22	0.19	0.15	0.11
	1000	75 W	0.69	0.40	0.35	0.30	0.23	0.17

## Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's D-Series Wall Size 1 homepage.

Isofootcandle plots for the DSXW1 LED 20C 1000 40K. Distances are in units of mounting height (15').

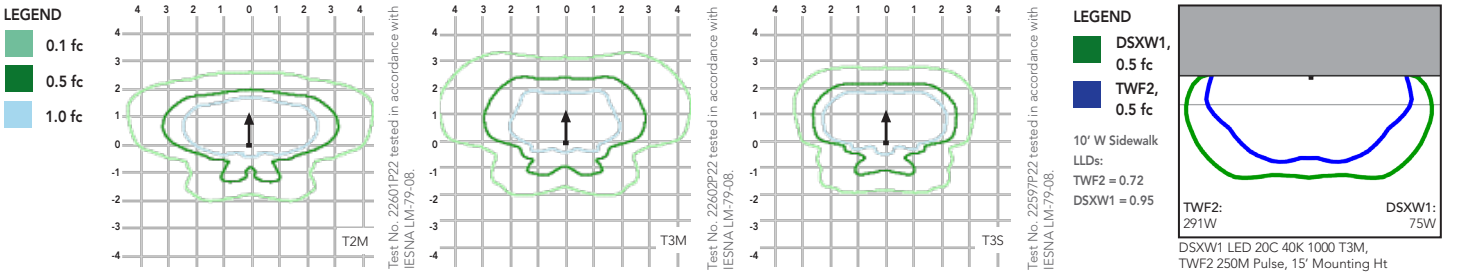

## Options and Accessories



T3M (left), ASYDF (right) lenses



HS - House-side shields



BSW - Bird-deterrent spikes



WG - Wire guard



VG - Vandal guard



DDL - Diffused drop lens

## FEATURES & SPECIFICATIONS

### INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 1 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

### CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in 3000 K (80 min. CRI), 4000 K (70 min. CRI) or 5000 K (70 CRI) configurations.

### ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L88/100,000 hrs at 25°C). Class 1 electronic drivers have a

power factor >90%, THD <20%, and a minimum 2.5KV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

### INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

### LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org](http://www.designlights.org) to confirm which versions are qualified.

### WARRANTY

Five year limited warranty. Full warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx).

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C. Specifications subject to change without notice.






# HI-LITE MFG. CO., INC.

13450 Monte Vista Avenue  
 Chino, California 91710  
 Telephone: (909) 465-1999  
 Toll Free: (800) 465-0211  
 Fax: (909) 465-0907  
 www.hilitemfg.com

JOB NAME: <b>Tractor Supply 1</b>		
SCALE: <b>N.T.S.</b>	DATE: <b>04/21/2017</b>	TYPE:
DRAWN BY: <b>S.M.-D</b>	QTY:	
SHEET:		REV:

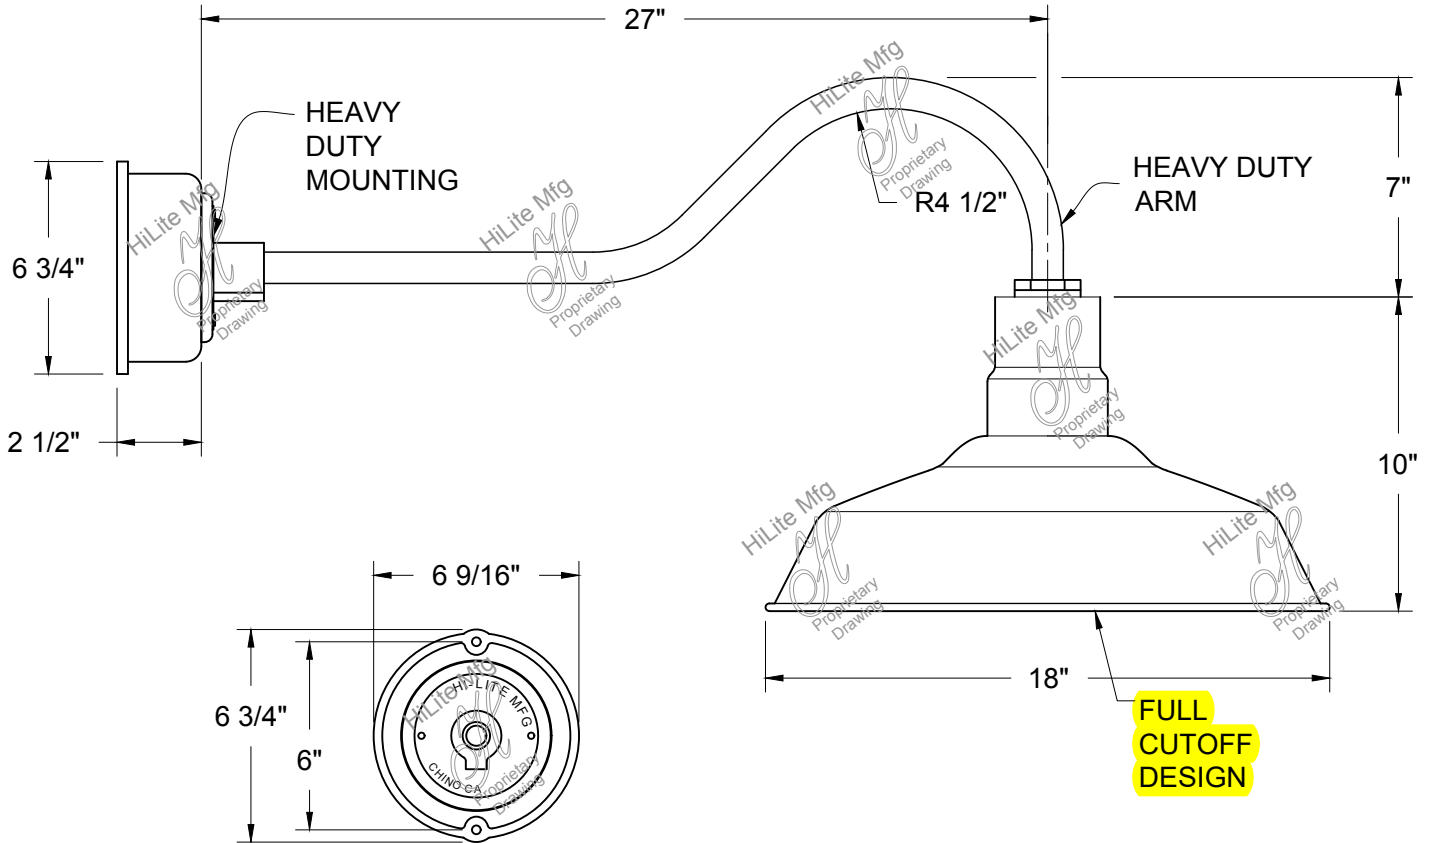

CANOPY FRONT VIEW

Item Number	Wattage	Voltage
H-15118-97/HL-AHD-27"97/21/LED2/40/D/BCM-M	21W	120/277V


**Finish**  
 97-Red (Fixture & Arm)

**Mounting**  
 Wall Mount

**Lamp/Socket**  
 21W LED2 2000 Lumens, 4000K

\*\*\*Confidential and Proprietary. The information contained on this page is the sole property of Hi-Lite Mfg. Co., Inc. Any reproduction, redistribution, or use to profit from in part or as a whole without prior written authorization of Hi-Lite Mfg. Co., Inc. is unlawful, against trade laws and will be prosecuted to the fullest extent.

**\*\*Drawing Not to Scale\*\***

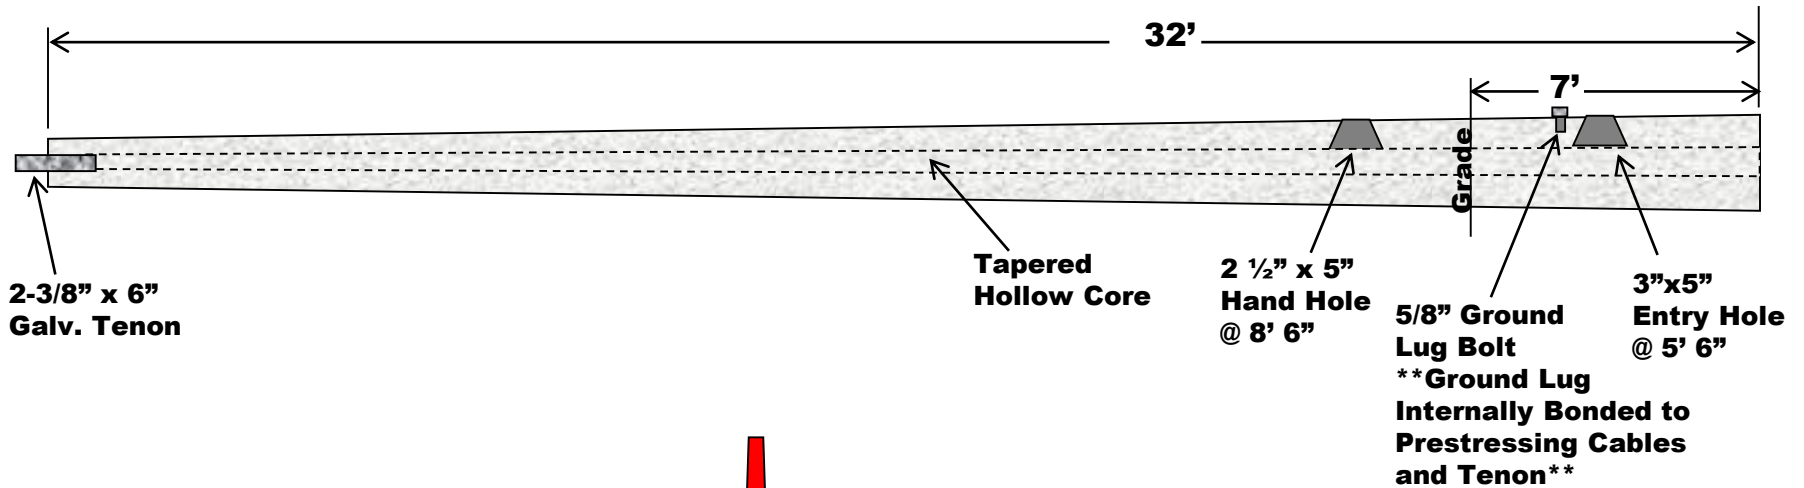

# Seminole Pole

## incorporated


www.SeminolePole.com  
Phone: 866-246-5545

Email: SeminolePole@gmail.com  
Fax: 229-524-2866


**Part#: SP3225TII**

### Project:

<b>Pole O.A.</b>	<b>Burial Depth</b>	<b>Wind Speed</b>	<b>Gust</b>	<b>EPA Capacity</b>
<b>32'</b>	<b>7'</b>	<b>150mph</b>	<b>3 sec.</b>	<b>11.0</b>
<b>Min. Brk. Strength</b>	<b>Strand Info</b>	<b>Concrete</b>	<b>Pole Weight (lb)</b>	
<b>3,500#</b>	<b>0.5" Diameter 270 ksi</b>	<b>6,500psi</b>	<b>1,900</b>	

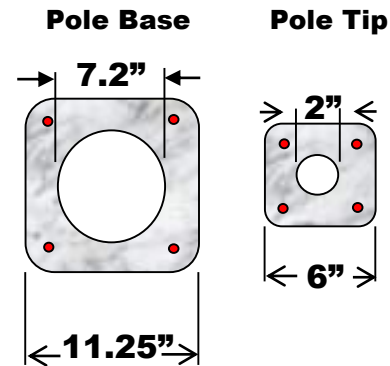

• =0.5" Diameter 7 Wire  
270k Low Relaxation  
Cable

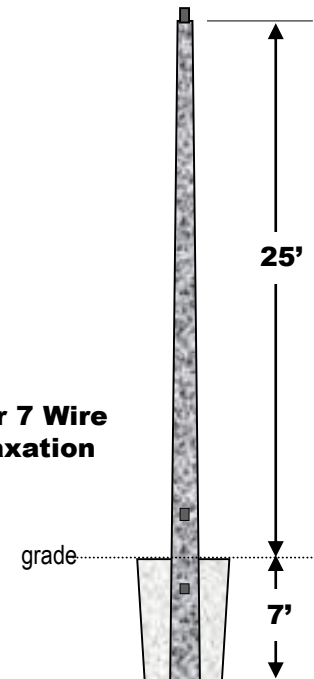



# RSX1 LED Area Luminaire




Catalog Number
Notes
Type

Hit the Tab key or mouse over the page to see all interactive elements.

## Specifications

<b>EPA (ft<sup>2</sup>@0°):</b>	0.57 ft <sup>2</sup> (0.05 m <sup>2</sup> )
<b>Length:</b>	21.8" (55.4 cm) (SPA mount)
<b>Width:</b>	13.3" (33.8 cm)
<b>Height:</b>	3.0" (7.6 cm) Main Body 7.2" (18.4 cm) Arm
<b>Weight (max):</b>	25.0 lbs (11.3 kg)

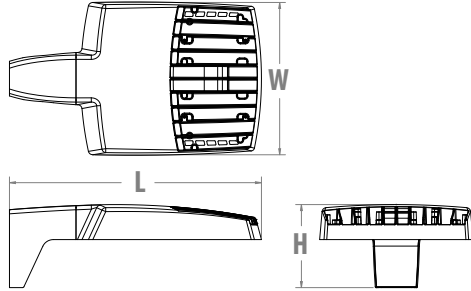

## Introduction

The new RSX LED Area family delivers maximum value by providing significant energy savings, long life and outstanding photometric performance at an affordable price. The RSX1 delivers 7,000 to 17,000 lumens allowing it to replace 70W to 400W HID luminaires.

The RSX features an integral universal mounting mechanism that allows the luminaire to be mounted on most existing drill hole patterns. This "no-drill" solution provides significant labor savings. An easy-access door on the bottom of mounting arm allows for wiring without opening the electrical compartment. A mast arm adaptor and an adjustable integral slip-fitter are also available.

## Ordering Information

**EXAMPLE: RSX1 LED P4 40K R3 MVOLT SPA DDBXD**

RSX1 LED	Performance Package	Color Temperature	Distribution	Voltage	Mounting
<b>RSX1 LED</b>	P1 P2 <b>P3</b> P4	30K 3000K 40K 4000K <b>50K</b> 5000K	<b>R3</b> Type 3 Wide R4 Type 4 Wide R5 Type 5 Wide R5S Type 5 Short AFR Automotive Front Row	<b>MVOLT</b> (120V-277V) <sup>1</sup> HVOLT (347V-480V) <sup>2</sup> <b>(use specific voltage for options as noted)</b> 120 <sup>3</sup> 277 <sup>3</sup> 208 <sup>3</sup> 347 <sup>3</sup> 240 <sup>3</sup> 480 <sup>3</sup>	SPA Square pole mounting (Min. 3.0" SQ for 1 at 90°, Min. 3.5" SQ for 2, 3, 4 at 90°) <b>RPA</b> Round pole mounting (3.2" min pole dia. for 1,2,3 or 4 at 90°) MA Mast arm adaptor (fits 2-3/8" OD horizontal tenon) IS Adjustable slipfitter (fits 2-3/8" OD tenon) <sup>4</sup> WBA Wall bracket

Options	Finish	
<p><b>Shipped Installed</b></p> <p>HS House-side shield</p> <p>PE Photocontrol, button style<sup>5,7</sup></p> <p>PEX Photocontrol external threaded, adjustable<sup>6,7</sup></p> <p>PER7 Seven-wire twist-lock receptacle only (no controls)<sup>7,8,9</sup></p> <p>CE34 Conduit entry 3/4" NPT (Qty 2)</p> <p>SF Single fuse (120, 277, 347)<sup>3</sup></p> <p>DF Double fuse (208, 240, 480)<sup>3</sup></p> <p>SPD20KV 20KV Surge pack (10KV standard)</p> <p>FAO Field adjustable output</p> <p>DMG 0-10V lead wires extended (no controls)</p> <p><b>Shipped Separately (requires some field assembly)</b></p> <p>EGS External glare shield</p> <p>EGFV External glare full visor (360° around light aperture)</p> <p>BS Bird spikes<sup>12</sup></p>	<p><b>Shipped Installed</b></p> <p><b>*Standalone Sensors Controls (factory default settings, see table page 5)</b></p> <p>PIRS Motion/ambient sensor for 8-20' mounting heights<sup>7,14,15</sup></p> <p>PIRHS Motion/ambient sensor for 20-40' mounting heights<sup>7,14,15</sup></p> <p><b>*Networked Sensors/Controls</b></p> <p>NLTAIR2 nLight AIR generation 2<sup>10,15</sup></p> <p>PIRHN Networked, Bi-Level motion/ambient sensor (for use with NLTAIR2)<sup>7,11,14,15</sup></p> <p><b>*Note: Sensor coverage pattern is affected when luminaire is tilted.</b></p>	<p><b>DDBXD</b> Dark Bronze</p> <p>DBLXD Black</p> <p>DNAXD Natural Aluminum</p> <p>DWHXD White</p> <p>DDBTXD Textured Dark Bronze</p> <p>DBLBXD Textured Black</p> <p>DNATXD Textured Natural Aluminum</p> <p>DWHGXD Textured White</p>



## Ordering Information

### Accessories

Ordered and shipped separately.

RSX1HS	RSX1 House side shield (includes 1 shield)
RSX1EGS U	External glare shield (specify finish)
RSX1EGFV U	External glare full visor (specify finish)
RSXRPA U	RSX Universal round pole adaptor plate (specify finish)
RCPIRS	Remote control PIRS/PIRHS field programmer
DLL127F 1.5 JU	Photocell -SSL twist-lock (120-277V) <sup>13</sup>
DLL347F 1.5 CUL JU	Photocell -SSL twist-lock (347V) <sup>13</sup>
DLL480F 1.5 CUL JU	Photocell -SSL twist-lock (480V) <sup>13</sup>
DSHORT SBK U	Shorting cap <sup>13</sup>

### NOTES

- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
- IS maximum tilt is 90° above horizontal.
- Requires MOVLT or 347V.
- Requires 120V, 208V, 240V, 277V or 347V.
- Not available in combination with other light sensing control options (following options cannot be combined: PE, PEX, PÉR7, PIRS, PIRHS, PIRHN).
- Twistlock photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included. Dimming leads capped for future use.

- For units with option PER7, the mounting must be restricted to +/- 45° from horizontal aim per ANSI C136.10-2010.
- Must be ordered with PIRHN.
- Must be ordered with NLTAIR2. For additional information on PIRHN visit [here](#).
- Must be ordered with fixture for factory pre-drilling.
- Requires luminaire to be specified with PER7 option. Ordered and shipped as a separate line item from Acuity Brands Controls.
- Two or more of the following options cannot be combined including DMG, PER7, FAO, PIRS, PIRHS and PIRHN.
- Requires MVOLT or HVOLT.

## External Shields



House Side Shield



External Glare Shield



External 360 Full Visor

## Pole/Mounting Information

Accessories including bullhorns, cross arms and other adaptors are available under the accessories tab at Lithonia's Outdoor Poles and Arms product page. Click here to visit [Accessories](#).

### Tenon Adapters


Tenon O.D.	Single Unit	2 at 180°	2 at 90°	3 at 120°	3 at 90°	4 at 90°
2-3/8"	AST20-190	AST20-280	AST20-290	AST20-320	AST20-390	AST20-490
2-7/8"	AST25-190	AST25-280	AST25-290	AST25-320	AST25-390	AST25-490
4"	AST35-190	AST35-280	AST35-290	AST35-320	AST35-390	AST35-490

### Pole Drilling Nomenclature


Number of heads at degree from handhole (default side A)					
DM19AS	DM28AS	DM29AS	DM32AS	DM39AS	DM49AS
1 @ 90°	2 @ 280°	2 @ 90°	3 @ 120°	3 @ 90°	4 @ 90°
Side B	Side B & D	Side B & C	Round pole only	Side B, C, & D	Sides A, B, C, D

Note: Review luminaire spec sheet for specific nomenclature


### HANDHOLE ORIENTATION



### RSX POLE DRILLING



### RSX STANDARD ARM






### RSX1 - Luminaire EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Tilt	Single	2 @ 90°	2 @ 180°	3 @ 90°	3 @ 120°	4 @ 90°	2 Side by Side	3 Side by Side	4 Side by Side
		Mounting Type								
SPA - Square Pole Adaptor	0°	0.57	1.03	1.05	1.52	1.36	2.03	1.13	1.7	2.26
RPA - Round Pole Adaptor	0°	0.57	1.03	1.05	1.52	1.36	2.03	1.13	1.7	2.26
MA - Mast Arm Adaptor	0°	0.57	1.03	1.05	1.52	1.36	2.03	1.13	1.7	2.26
IS - Integral Slipfitter	0°	0.57	1.03	1.05	1.52	1.36	2.03	1.31	1.7	2.26
	10°	0.68	1.34	1.33	2	1.74	2.64	1.35	2.03	2.71
	20°	0.87	1.71	1.73	2.56	2.26	3.42	1.75	2.62	3.49
	30°	1.24	2.19	2.3	3.21	2.87	4.36	2.49	3.73	4.97
	40°	1.81	2.68	2.98	3.85	3.68	5.3	3.62	5.43	7.24
	45°	2.11	2.92	3.44	4.2	4.08	5.77	4.22	6.33	8.44
	50°	2.31	3.17	3.72	4.52	4.44	6.26	4.62	6.94	9.25
	60°	2.71	3.66	4.38	5.21	5.15	7.24	5.43	8.14	10.86
	70°	2.78	3.98	4.54	5.67	5.47	7.91	5.52	8.27	11.03
	80°	2.76	4.18	4.62	5.97	5.76	8.31	5.51	8.27	11.03
90°	2.73	4.25	4.64	6.11	5.91	8.47	5.45	8.18	10.97	




## Dimensions

### RSX1 with Round Pole Adapter (RPA)

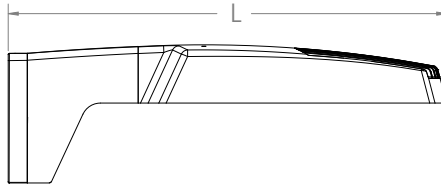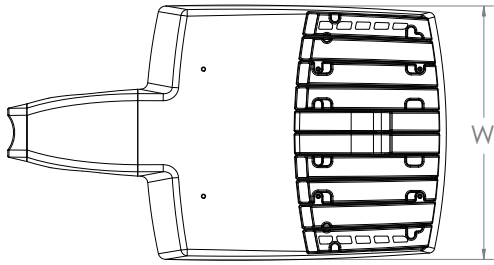



Length: 22.8" (57.9 cm)  
 Width: 13.3" (33.8 cm)  
 Height: 3.0" (7.6 cm) Main Body  
 7.2" (18.4 cm) Arm

### RSX1 with Adjustable Slipfitter (IS)

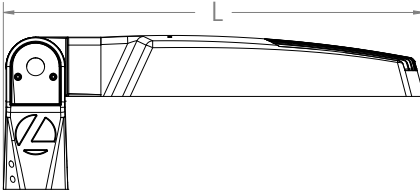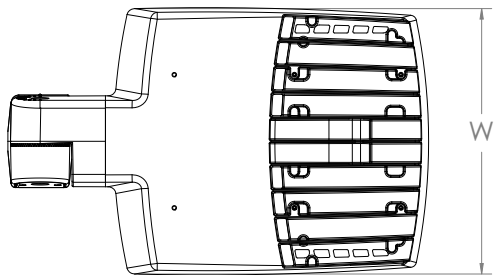

Length: 20.7" (52.7 cm)  
 Width: 13.3" (33.8 cm)  
 Height: 3.0" (7.6 cm) Main Body  
 7.6" (19.3 cm) Arm

### RSX1 with Mast Arm Adapter (MA)

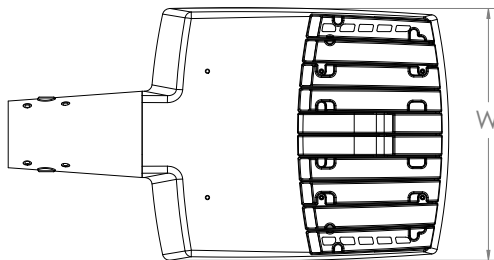


Length: 23.2" (59.1 cm)  
 Width: 13.3" (33.8 cm)  
 Height: 3.0" (7.6 cm) Main Body  
 3.5" (8.9 cm) Arm



# Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [RSX Area homepage](#).

Isofootcandle plots for the RSX1 LED P4 40K. Distances are in units of mounting height (20').

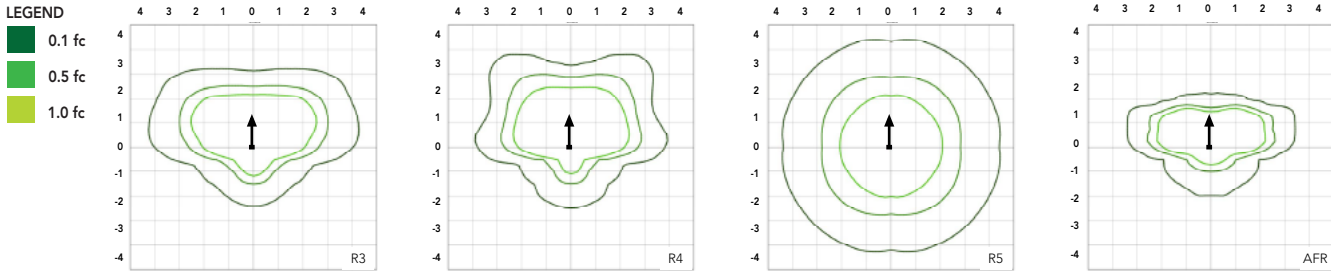

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-50°C (32-122°F).

Ambient	Ambient	Lumen Multiplier
0°C	32°F	1.05
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97
45°C	113°F	0.96
50°C	122°F	0.95

### Electrical Load

Performance Package	System Watts (W)	Current (A)					
		120V	208V	240V	277V	347V	480V
P1	51W	0.42	0.25	0.21	0.19	0.14	0.11
P2	72W	0.60	0.35	0.30	0.26	0.21	0.15
P3	109W	0.91	0.52	0.45	0.39	0.31	0.23
P4	133W	1.11	0.64	0.55	0.48	0.38	0.27

### Projected LED Lumen Maintenance

Operating Hours	50,000	75,000	100,000
Lumen Maintenance Factor	>0.97	>0.95	>0.92

Values calculated according to IESNA TM-21-11 methodology and valid up to 40°C.

### Lumen Output




Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance Package	System Watts	Distribution Type	30K (3000K, 70 CRI)					40K (4000K, 70 CRI)					50K (5000K, 70 CRI)				
			Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P1	51W	R3	6,459	1	0	2	127	7,096	1	0	2	139	7,096	1	0	2	139
		R4	6,543	1	0	2	128	7,189	1	0	2	141	7,189	1	0	2	141
		R5	6,631	3	0	2	130	7,286	3	0	2	143	7,286	3	0	2	143
		R5S	6,807	3	0	1	133	7,479	3	0	1	147	7,479	3	0	1	147
		AFR	6,473	1	0	1	127	7,112	1	0	1	139	7,112	1	0	1	139
P2	72W	R3	8,959	2	0	2	124	9,843	2	0	2	137	9,843	2	0	2	137
		R4	9,077	2	0	2	126	9,972	2	0	2	139	9,972	2	0	2	139
		R5	9,198	4	0	2	128	10,106	4	0	2	140	10,106	4	0	2	140
		R5S	9,443	3	0	1	131	10,374	3	0	1	144	10,374	3	0	1	144
		AFR	8,979	2	0	1	125	9,865	2	0	1	137	9,865	2	0	1	137
P3	109W	R3	12,763	2	0	2	117	14,023	2	0	2	129	14,023	2	0	2	129
		R4	12,930	2	0	2	119	14,206	2	0	2	130	14,206	2	0	2	130
		R5	13,104	4	0	2	120	14,397	4	0	2	132	14,397	4	0	2	132
		R5S	13,452	3	0	2	123	14,779	3	0	2	136	14,779	3	0	2	136
		AFR	12,791	2	0	1	117	14,053	2	0	2	129	14,053	2	0	2	129
P4	133W	R3	14,890	2	0	3	112	16,360	2	0	3	123	16,360	2	0	3	123
		R4	15,085	2	0	3	113	16,574	2	0	3	125	16,574	2	0	3	125
		R5	15,287	4	0	2	115	16,796	4	0	2	126	16,796	4	0	2	126
		R5S	15,693	4	0	2	118	17,242	4	0	2	130	17,242	4	0	2	130
		AFR	14,923	2	0	2	112	16,395	2	0	2	123	16,395	2	0	2	123




# Sensor Coverage

Motion Sensor Default Settings (PIRS and PIRHS only)						
Option	Dimmed State	High Level (when triggered)	Photocell Operation	Dwell Time	Ramp-up Time	Ramp-down Time
PIRS or PIRHS	Approx. 37% Output	100% Output	Enabled @ 5FC	5 minutes	3 seconds	20 seconds

## PIRS Coverage Patterns

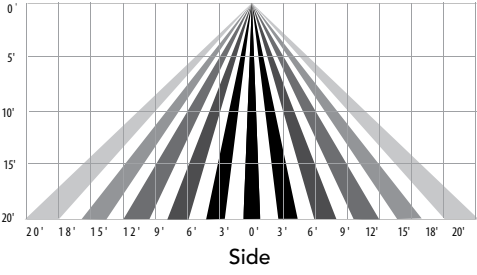




## PIRHS Coverage Pattern

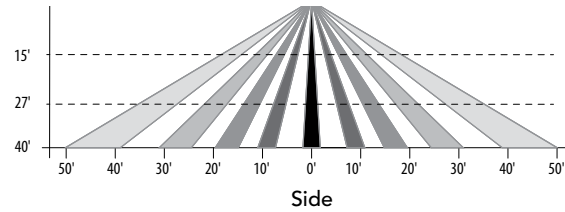

## PIRHN nLight Sensor Coverage Pattern

nLight PIRHN

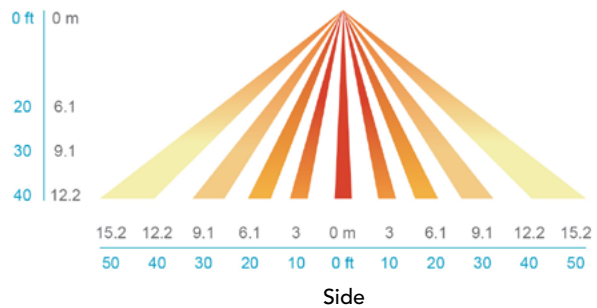

## FEATURES & SPECIFICATIONS

### INTENDED USE

The RSX LED area luminaire is designed to provide a long-lasting, energy-efficient solution for the one-for-one replacement of existing metal halide or high pressure sodium lighting. The RSX1 delivers 7,000 to 17,000 lumens and is ideal for replacing 70W to 400W HID pole-mounted luminaires in parking lots and other area lighting applications.

### CONSTRUCTION

The RSX LED area luminaire features a rugged die-cast aluminum main body that uses heat-dissipating fins and flow-through venting to provide optimal thermal management that both enhances LED performance and extends component life. Integral "no drill" mounting arm allows the luminaire to be mounted on existing pole drillings, greatly reducing installation labor. The light engines and housing are sealed against moisture and environmental contaminants to IP66. The low-profile design results in a low EPA, allowing pole optimization. All mountings are rated for a 1.5 G vibration load per ANSI C136.31.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures superior adhesion as well as a minimum finish thickness of 3 mils. The result is a high-quality finish that is warranted not to crack or peel.

### OPTICS

Precision acrylic refractive lenses are engineered for superior application efficiency, distributing the light to where it is needed most. Available in short and wide pattern distributions including Type 3, Type 4, Type 5, Type 5S and AFR (Automotive Front Row).

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted on metal-core circuit boards and aluminum heat sinks to maximize heat dissipation. Light engines are IP66 rated. LED lumen maintenance is >L92/100,000 hours. CCT's of 3000K, 4000K and 5000K (minimum 70 CRI) are available. Class 1 electronic drivers ensure system power factor >90% and THD <20%. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The RSX LED area luminaire has a wide assortment of control options. Dusk to dawn controls include MVOLT and 347V button-type photocells and NEMA twist-lock photocell receptacles. Integrated motion sensors with on-board photocells feature remote control sensor programming and are suitable for mounting heights up to 40 feet.

### nLIGHT AIR CONTROLS

The RSX LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocell functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Integral "no-drill" mounting arm allows for fast, easy mounting using existing pole drillings. Select the "SPA" option for square poles and the "RPA" option to mount to round poles. Select the "MA" option to attach the luminaire to a 2 3/8" horizontal mast arm or the "IS" option for an adjustable slipfitter that mounts on a 2 3/8" OD tenon. The adjustable slip fitter has an integral junction box and offers easy installation. IS adjustable slipfitter is not rated for tilting above 90° or mounting within 4 feet of ground. Can be tilted up to 90° above horizontal.

### LISTINGS

CSA Certified to meet U.S. and Canadian standards. Suitable for wet locations. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

### WARRANTY

5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

